

Fuse



Size

Fuse LED Pendant


Description

Inspired by an Automotive fuse, the FUSE LED pendant light is a representation of an illuminated fuse. The Fuse is lit vertically, and diffused with an acrylic cylindrical shade. An MR11 LED bulb provides task lighting, with directional down lighting.

The light is suspended by a thin aircraft cable looking wire, making the light to appear to be floating in the air.

The light can be finished in black, silver or gold anodized finish. The LEDs are available in alternate color temperatures and are dimmable.

Designed by Maurice Dery

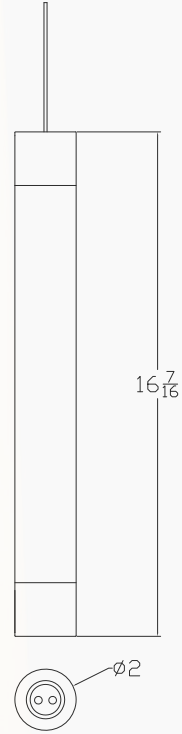

Model Number

Example : Fuse - PN02 - 30LV - 01A1 - CLACLA - 01PH

Name	Style	Size	Color Temp	Power	Quantity	Canopy Style	Fixture Color	Canopy Color	Lumen Output	Dimming Options
XXXXXX	PN - Pendant CH - Chandelier WS - Wall Sconce FL - Floor Lamp T - Table Lamp	02 - 2" Dia	27 - 2700K 30 - 3000K	AC - Line Voltage (120V 60Hz) LV - Low Voltage GL - Global Voltage (200 - 240 50Hz)	Number of pendants and or light sources. 01 - One pendant / light source	Various canopy options available including standard options and custom canopy requests. See Canopies and Suspension page for all options. For example A1 - 6" Dia Canopy	GLA - Gold CLA - Clear BKA - Black	GLA - Gold CLA - Clear BKA - Black	01 - Standard 02 - Hi Output 03 - Custom	PH - Phase Dimming 10 - 0-10 V Dimming ELV - ELV Dimming DALI - DALI Dimming

Note: Not all options are available for all models

Specifications

Specifications	
Standard Lumen Output	
Voltage	12 VDC
Wattage	10 Watts
Lumen Output (Tube)	~ 856 Lumens
Lumen Output (Down Light)	~ 120 Lumens
Light Sources	Karice LED Tape 8 Watts MR11 2 Watts
CRI	91+ CRI

Finishes


Standard finishes available, Custom finish options available upon request



GLA
Light Gold
Anodized



CLA
Clear
Anodized



BKA
Black
Anodized



Karice Lighting
karicelighting.com
info@karicelighting.com
1(604) 542 7137

Karice